

Zúčastněte se

# CASIO




První projektor vybavený novým Laser & LED hybridním světelným zdrojem s životností až 20.000 hodin

Jediný projektor se světelným výkonem až 2500 ANSI Lm bez obsahu rtuti

- Nový, revoluční světelný zdroj  
10 x delší životnost světelného zdroje  
v provnání s vysokotlakými rtuťovými výbojkami
- Výrazné omezení provozních nákladů
- Konstantní světelný výkon
- Brilantní a přirozené podání barev
- Ultratenký design, výška pouze 43 mm
- Spotřeba < 1W v pohotovostním režimu
- 2 x optický zoom
- USB připojení pro prezentaci bez PC
- Bezdrátový přenos dat Wi-Fi u modelů s USB
- Rychlý start (8 sec.) a okamžité vypnutí
- HDMI připojení



XJ-A145

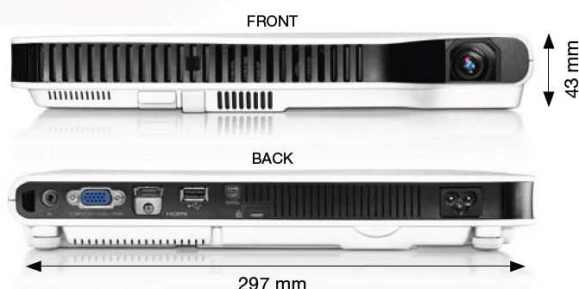

Více informací získáte na [www.fast-projektory.cz](http://www.fast-projektory.cz)  
nebo na [www.casio-projectors.eu](http://www.casio-projectors.eu)

	XGA	WXGA	
<b>XGA models:</b> XJ-A130 XJ-A135 XJ-A140 XJ-A145	<b>Display</b>	Technology: 0.55-inch DLP® Chip Resolution: 1024 x 768 pixels	0.65-inch DLP® Chip 1280 x 800 pixels
	<b>Projected image</b>	Contrast ratio 1800 : 1 (in tele mode); colour depth: 16.7 million	
<b>WXGA models:</b> XJ-A230 XJ-A235 XJ-A240 XJ-A245	<b>Projection lens</b>	Type: 2x optical zoom Projection ratio: 1.4–2.8 : 1 (distance : image width) Offset: 100% Min. distance: 0.84 m	1.15–2.3 : 1 (distance: image width) 84%
	<b>Projection</b>	Projection screen size: 15" (0.38 m) to 300" (7.62 m) Projection range: 60" screen (1.52 m) Screen diagonal 60": 1.7 m to 3.4 m Screen diagonal 100": 2.8 m to 5.6 m	18" (0.46 m) to 300" (7.62 m) 1.4 m to 2.8 m 2.4 m to 4.8 m
	<b>Light source</b>	Type: laser and LED hybrid technology Operating hours: approx. 20,000 hours (Guaranteed for 3 years or 6,000 hours)	
	<b>Keystone correction</b>	Vertical (automatic / manual): + 30° / ±30°	
<b>Interface terminals</b>	Computer: 1x15 pin D-Sub Digital input: HDMI port Video/audio: composite: 1x3.5-mm mini jack for audio input/output Component video input: opt. adapter to 15-pin HD Serial RS-232C: YK-5 (optional accessory) USB: 1x type A (USB 2.0) Plug-in USB device: USB stick, CASIO YW-3 wireless adapter, CASIO YC-400/YC-430 multifunction camera system		
<b>Audio volume</b>	Audio speakers 1W; Operating noise 35 dB (eco on level 1) / 29 dB (eco on level 2)		
<b>Power consumption</b>	Operating: 270 W (eco off) / 190 W (eco on level 1) / 130 W (eco on level 2) Standby: 0,4 W (100–120 V), 0,6 W (220–240 V)		
<b>Computer compatibility</b>	Compressed max. resolution: UXGA (1600 x 1200 pixels)		
<b>Video compatibility</b>	Video standards: PAL-N/-M, PAL60, SECAM, NTSC; signals: composite video, YcbCr, YPbPr		
<b>Included accessories</b>	RGB cable, video cable, power cable, IR remote, user manual on CD, carrying case		
<b>Other specs</b>	Dimensions (LxWxH): 297 mm x 210 mm x 43 mm Weight: 2.3 kg; body/colour: white		

\*Function can only be guaranteed for products specifically designated by CASIO. Visit the Casio website for more details about supported USB sticks.

This overview illustrates the differences between the various models.

Model	ANSI LUMEN	WXGA / XGA	USB/WLAN
XJ-A130	2.000	XGA	-
XJ-A135	2.000	XGA	USB/WLAN
XJ-A140	2.500	XGA	-
XJ-A145	2.500	XGA	USB/WLAN
XJ-A230*	2.000	WXGA	-
XJ-A235*	2.000	WXGA	USB/WLAN
XJ-A240	2.500	WXGA	-
XJ-A245	2.500	WXGA	USB/WLAN

\*Expected at May 2010 on.



The DLP® logo is a registered trademark of Texas Instruments. Last updated: July 2008. We accept no liability for errors or differences in design or colour, and reserve the right to make technical changes without notice.