

ULTRA KRÁTKOU


SANYO

PROJEKTOR PLC-XL50 S ULTRA KRÁTKOU PROJEKČNÍ VZDÁLENOSTÍ



SANYO PLC XL50

PLÁTNO S ÚHLOPŘÍČKOU 2 m



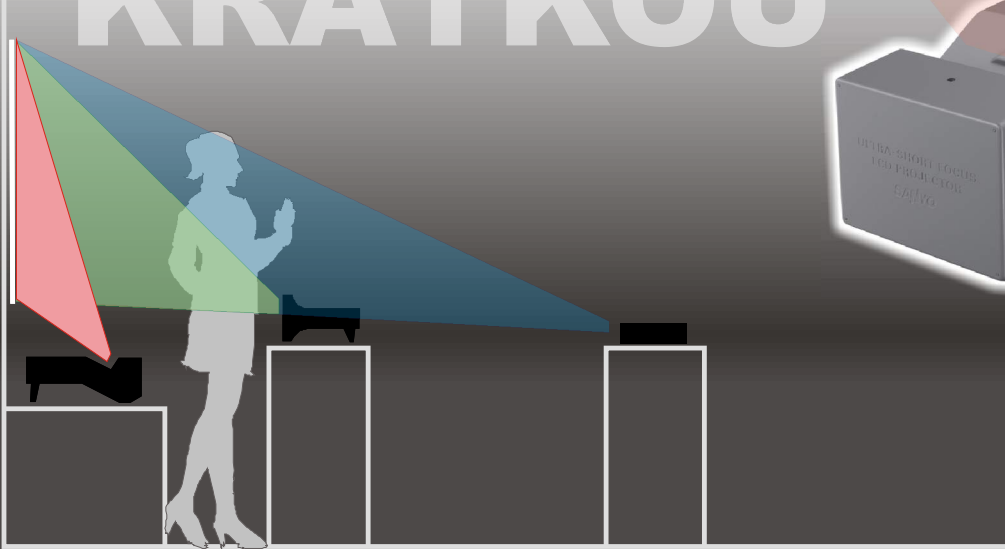


PLC XL50
Vzdálenost 8 cm

PLC XL45
Vzdálenost 98 cm

PLC XU84
Vzdálenost 220 cm

Příklady instalací a výhody projektoru s ultra krátkou projekční vzdáleností

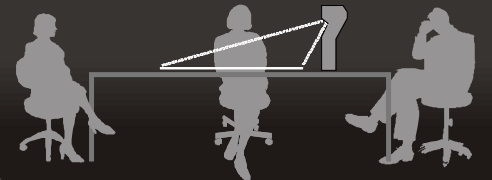

FAST

FAST ČR, a.s.: Černokostelecká 1621 251 01 Říčany u Prahy Tel.: 323 204 148 Fax: 323 204 110
www.fast-projektory.cz info@fast-projektory.cz

SANYO LCD PROJEKTOR

Model: PLC-XL50

Model name	SANYO PLC-XL50 series
Panel	0.8 inch TFT p-Si x 3
No. of pixels	2,359,296 (1024x768 dots)
Projection lamp	275W NSHA 1.1mm (275 ~ 220 W)
Expectation of lamp life	(Life Survival ratio 50%, Maintenance integral 40%) Lamp mode : Normal 2000 hours Eco 3000 hours
Brightness (typical)	2000 lm
Contrast	600 : 1 (Lamp mode "Auto", Image mode "Dynamic")
Uniformity	80 % (corner to center)
Projection lens Screen size	F1.85, f=4.83 mm, Fixed Ultra Short Focus 60"~80" (80" at 8.1cm)
HDTV signals	480i, 480p, 575i, 575p, 720p, 1035i and 1080i
Color systems	PAL / SECAM / NTSC / NTSC4.43 / PAL-M/N
Video Signal	Composite, S-Video, Component
Video Terminal	RCA x 1 : Video Mini-DIN 4-pin : S-Video RCA x 3 : Y - Pb/Cb - Pr/Cr
Computer compatibility	UXGA/WXGA/SXGA/XGA/SVGA/VGA/MAC
Computer Terminal	D-sub 15 pin for Input D-sub 15 pin for Input or Monitor out
Audio	RCA (L/R) for Video Input Mini-Jack(Stereo) for Computer Input Mini-Jack(Stereo) for output (variable)
Communication Terminal	Service Port (RS-232C)
Presentation Tool	Freeze / Digital Zoom / No Show / etc
Other Feature	Progressive, 3-2 & 2-2 pull down, LTI & CTI, User Logo
Scanning frequency	H/V sync ~100kHz, ~100Hz Dot clock 140 MHz
Sound output	2.0 W Mono
Fan Noise	No Announce
Voltage	100V-240V AC (auto voltage)
Power consumption	390/330 W (10W)
Dimensions (W x H x D)	374 x 196.8 x 495 mm
Weight	7.6 kg (16.7 lbs)

* Replacement Lamp Type No. : POA-LMP121

2007. 10. 09